



SOLID
TO SUCCEED

SCISSOR LIFT

XG0807AEW



HYDRAULIC OIL FREE

The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.

XG0807AEW

Scissor lift




FEATURES

PRODUCTIVITY

- 2 front driving wheels
- 25% theoretical gradeability
- Battery charge indicator and diagnostic display
- Manual platform lowering valve
- Both platform and ground control panel with emergency stop button
- Front wheel multi-disc brakes
- Manual brake release
- Solid non-marking tires
- Mobile pothole protection
- Tilt alarm
- Hourmeter record
- Lift and lower alarm
- Horn
- Dual flashing beacons
- Drive alarm
- Overload alarm

OPTIONS

- Platform working light
- Air-line to platform
- AC power to the platform

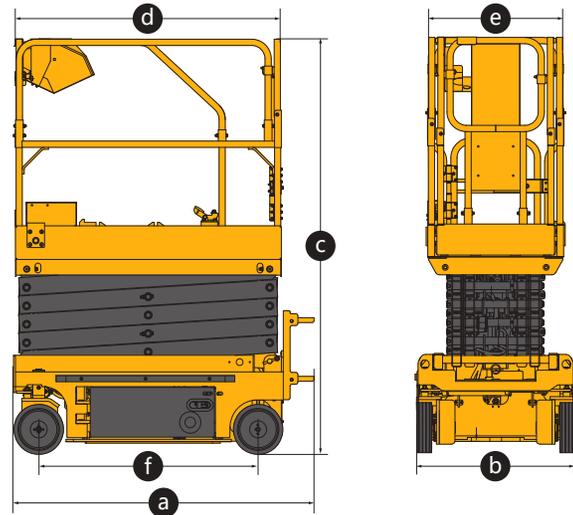

| Item | Unit | XG0807AEW |
|---|------|-------------|
| Lift capacity | kg | 280 |
| Lift capacity of auxiliary platform | kg | 115 |
| Occupant capacity | - | 2 |
| Working height | m | 7.8 |
| Platform height | m | 5.8 |
| Length of auxiliary platform | mm | 900 |
| Ground clearance (pothole protector – raised/lowered) | mm | 65/20 |
| Turning radius (inside/outside) | m | 0.02/1.75 |
| Drive motor | kW | 0.5 |
| Lift motor | kW | 1.4 |
| Drive speed (retracted/extended) | km/h | 4.0/0.8 |
| Lift/Lower time | s | 13~30/30~45 |
| Gradeability | % | 25 |
| Tilt alarm (side/forward and backward) | ° | 1.5/3.5 |
| Batteries | V/Ah | 2×12/75 |
| Charger | V/A | 24/30 |
| Tires | - | 323×100 |
| Weight | kg | 1600 |
| a Length (without ladder) | mm | 1900(1680) |
| b Width | mm | 810 |
| c Height (platform folded) | mm | 2160(1830) |
| d x e Platform size (Length x Width) | mm | 1670×740 |
| f Wheelbase | mm | 1360 |

SOLID TO SUCCEED